



VX 570 - Vortex Flow sensor for steam, gases and liquids

The high-precision all-rounder with integrated pressure and temperature compensation

FIELD OF APPLICATION:


- Measurement of saturated steam or superheated steam
- Measurement of liquids
- Measurement of mixed gases
- Measurement of corrosive media

Benefits at a glance:

- Measurement of standard volume flow, operating volume flow, mass flow
- Measurement at high temperatures of up to 662 °F
- Measurement up to 913 psi
- Suitable for unknown/changing gas compositions and mixed gases
- Aggression resistant – all parts in contact with media made of stainless steel
- Not sensitive to vibrations due to reference vibration measurement
- No moving parts



Vortex operating principle, vortex frequency:

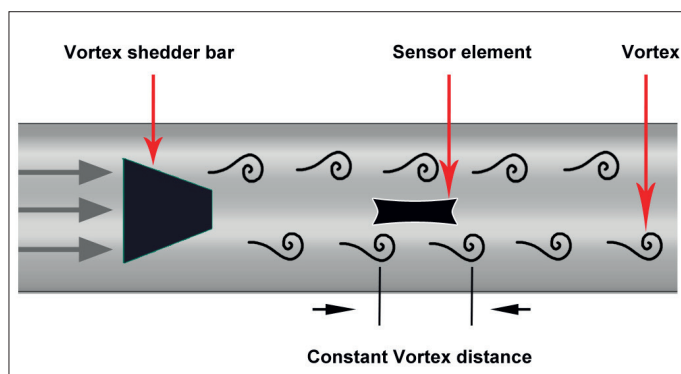



Example code for VX 570:

0698 0570_A1_B1_C1_D1_E1_F1_G1_H1_I1

Basic model	
A1	Vortex mass flow meter with integrated temperature and pressure sensor
A2	Vortex flow meter without integrated temperature and pressure sensor

Measured medium:	
B1	Steam
B2	Liquids
B3	Gas

Display option	
C1	With display

Measuring section	
D1	1/2" (DN 15)
D2	3/4" (DN 20)
D3	1" (DN 25)
D4	1 1/4" (DN 32)
D5	1 1/2" (DN 40)
D6	2" (DN 50)
D7	2 1/2" (DN 65)
D8	3" (DN 80)
D9	4" (DN 100)
D10	5" (DN 125)
D11	6" (DN 150)
D12	8" (DN 200)
D13	10" (DN 250)
D14	12" (DN 300)

Process connection	
E1	Wafer type up to 16 bar(g) / 232 psi(g)
E2	Flange DIN PN 16
E3	Flange DIN PN 25
E4	Flange DIN PN 40
E5	Flange DIN PN 63
E6	Flange ANSI Class 150 lbs
E7	Flange ANSI Class 300 lbs
E8	Flange ANSI Class 400 lbs

Signal outputs / bus connection option	
F1	3 x 4...20 mA analogue output (not electrically isolated), RS 485 (Modbus-RTU)
F3	RS 485 (Modbus-RTU)

Reference standard	
G1	68 °F, 1000 mbar
G2	32 °F, 1013.25 mbar
G3	59 °F, 981 mbar
G4	59 °F, 1013.25 mbar
G5	Operating conditions

Surface condition	
H1	Standard version
H2	Special cleaning – oil and grease free (e.g. for oxygen application)

Max. process temperature	
I1	up to 302 °F
I2	up to 482 °F
I3	up to 662 °f (can only be selected in combination with A2)

Measuring ranges of VX 570 (in ft/s under operating conditions)						
Nominal width	Gas		Steam		Liquids	
	from	to	from	to	from	to
DN 15 - DN 20	19,68	196,85	19,68	229,65		
DN 25 - DN 32	13,12	196,85	13,12	229,65	0,98	22,96
DN 40 - DN 300	6,56	196,85	6,56	229,65	ft/s	ft/s

TECHNICAL DATA VX 570

Measuring range:	See table
Measured medium:	Primary single-phase gases, mixed gases, saturated steam, superheated steam and liquids
Accuracy:	Gas / Steam:
Volume flow (m³/h)	± 1 % of m.v., (Re > 20,000) ± 2 % of m.v., (10,000 < Re < 20,000)
	Liquids:
	± 0.75 % of m.v., (Re > 20,000) ± 2 % of m.v., (10,000 < Re < 20,000)
Mass flow (kg/h) or standard volume flow (Nm³/h)	Gas / Steam:
	± 1.5 % of m.v., (Re > 20,000) ± 2.5 % of m.v., (10,000 < Re < 20,000)
Measuring principle:	Vortex – vortex frequency measurement
Process temperature:	-40...+662 °F
Process pressure:	up to 913 psi
Protection class	IP67
Material measuring section and parts in contact with medium:	Stainless steel 304
Material display unit:	Aluminium – die casting
Signal outputs:	As standard: RS 485 (Modbus-RTU), 3x 4...20 mA,
	Optional: Ethernet interface
Power supply:	18...36 VDC
Measuring span:	Gases: 1:30 Vapour: 1:35 Liquids 1:23
Viscosity	DN 15 ≤ 4 mPas DN 25 ≤ 5 mPas DN 40...DN 300 ≤ 7 mPas
Repeatability:	± 0.3 % of m.v.
Process connection:	Flange DIN EN1092-1 Flange ANSI Wafer type

DESCRIPTION	ORDER NO.
VX 570 – Vortex flow sensor for steam, gases and liquids	0698 0570 + Order code A...I_
Further accessories: ISO calibration certificate at 5 measuring points	3200 0001



Measuring ranges for gases and liquids VX 570 under operating conditions										
Inside diameter of pipe			Gases				Liquids			
			Min flow m ³ /h	Max flow m ³ /h	Min flow cfm	Max flow cfm	Min flow m ³ /h	Max flow m ³ /h	Min flow GPM	Max flow GPM
Inch	mm	DN								
1/2"	15	DN 15	3.8	44.5	2.2	26.2	0.2	4.4	0.8	19.6
3/4"	20	DN 20	6.8	79.1	4	46.6	0.3	7.9	1.5	34.8
1"	25	DN 25	7.1	123.6	4.2	72.7	0.5	12.4	2.3	54.4
1 1/4"	32	DN 32	11.6	202.5	6.8	119.2	0.9	20.2	3.8	89.2
1 1/2"	40	DN 40	9	316.4	5.3	186.2	1.4	31.6	6.0	139.3
2"	50	DN 50	14.1	494.4	8.3	291	2.1	49.4	9.3	217.7
2 1/2"	65	DN 65	23.9	835.5	14	491.7	3.6	83.5	15.8	367.8
3"	80	DN 80	36.2	1,265.5	21.3	744.9	5.4	126.6	23.9	557.2
4"	100	DN 100	56.5	1,977.4	33.3	1,163.9	8.5	197.7	37.3	870.6
5"	125	DN 125	88.3	3,089.7	52	1,818.5	13.2	309.0	58.3	1,360.4
6"	150	DN 150	127.1	4,449.2	74.8	2,618.7	19.1	444.9	84.0	1,958.9
8"	200	DN 200	226	7,909.6	133	4,655.4	33.9	791.0	149.3	3,482.5
10"	250	DN 250	353.1	12,358.8	207.8	7,274.1	53.0	1,235.9	233.2	5,441.4
12"	300	DN 300	508.5	17,796.6	299.3	10,474.7	76.3	1,779.7	335.8	7,835.6

Measuring ranges for steam VX 570 under operating conditions in kg/h																
Inside diameter of pipe			T=112 °C		T=121 °C		T=134 °C		T=144 °C		T=159 °C		T=165 °C		T=171 °C	
			P=0.5 bar(g)		P=1 bar(g)		P=2 bar(g)		P=3 bar(g)		P=5 bar(g)		P=6 bar(g)		P=7 bar(g)	
			D=0.8798 kg/m ³		D=1.155 kg/m ³		D=1.672 kg/m ³		D=2.185 kg/m ³		D=3.182 kg/m ³		D=3.671 kg/m ³		D=4.218 kg/m ³	
Inch	mm	DN	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
1/2"	15	DN 15	3.4	39.1	4.4	51.4	6.4	74.4	8.3	97.2	12.1	141.6	14.0	163.3	16.1	187.7
3/4"	20	DN 20	6.0	69.6	7.8	91.4	11.3	132.2	14.8	172.8	21.6	251.7	24.9	290.4	28.6	333.6
1"	25	DN 25	6.2	108.7	8.2	142.7	11.8	206.6	15.4	270.0	22.5	393.3	25.9	453.7	29.8	521.3
1 1/4"	32	DN 32	10.2	178.1	13.4	233.9	19.3	338.6	25.3	442.4	36.8	644.3	42.5	743.3	48.8	854.1
1 1/2"	40	DN 40	8.0	278.4	10.4	365.4	15.1	529.0	19.8	691.3	28.8	1,006.7	33.2	1,161.4	38.1	1,334.5
2"	50	DN 50	12.4	434.9	16.3	571.0	23.6	826.6	30.9	1,080.2	44.9	1,573.0	51.9	1,814.8	59.6	2,085.2
2 1/2"	65	DN 65	21.0	735.0	27.6	964.9	39.9	1,396.9	52.2	1,825.5	76.0	2,658.4	87.6	3,066.9	100.7	3,523.9
3"	80	DN 80	31.8	1,113.4	41.8	1,461.7	60.5	2,116.0	79.0	2,765.2	115.1	4,026.9	132.7	4,645.8	152.5	5,338.0
4"	100	DN 100	49.7	1,739.7	65.3	2,283.9	94.5	3,306.2	123.4	4,320.6	179.8	6,292.1	207.4	7,259.0	238.3	8,340.7
5"	125	DN 125	77.7	2,718.3	102.0	3,568.6	147.6	5,166.0	192.9	6,751.0	280.9	9,831.4	324.1	11,342.2	372.4	13,032.3
6"	150	DN 150	111.8	3,914.4	146.8	5,138.8	212.5	7,439.0	277.8	9,721.4	404.5	14,157.2	466.7	16,332.8	536.2	18,766.5
8"	200	DN 200	198.8	6,958.9	261.0	9,135.6	377.9	13,224.9	493.8	17,282.5	719.1	25,168.4	829.6	29,036.2	953.2	33,362.7
10"	250	DN 250	310.7	10,873.2	407.8	14,274.4	590.4	20,663.8	771.5	27,003.9	1,123.6	39,325.6	1,296.3	45,369.0	1,489.4	52,129.2
12"	300	DN 300	447.4	15,657.5	587.3	20,555.1	850.2	29,755.9	1,111.0	38,885.6	1,618.0	56,628.8	1,866.6	65,331.4	2,144.7	75,066.1

Measuring ranges for steam VX 570 under operating conditions kg/h														
Inside diameter of pipe			T=176 °C		T=185 °C		T=192 °C		T=199 °C		T=210 °C		T=215 °C	
			P=8 bar(g)		P=10 bar(g)		P=12 bar(g)		P=14 bar(g)		P=18 bar(g)		P=20 bar(g)	
			D=4.723 kg/m ³		D=5.752 kg/m ³		D=6.671 kg/m ³		D=7.706 kg/m ³		D=9.593 kg/m ³		D=10.57 kg/m ³	
Inch	mm	DN	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
1/2"	15	DN 15	18.0	210.1	21.9	255.9	25.4	296.8	29.4	342.9	36.6	426.8	40.3	470.3
3/4"	20	DN 20	32.0	373.6	39.0	455.0	45.2	527.6	52.2	609.5	65.0	758.8	71.7	836.0
1"	25	DN 25	33.4	583.7	40.6	710.9	47.1	824.5	54.4	952.4	67.7	1,185.6	74.6	1,306.3
1 1/4"	32	DN 32	54.6	956.3	66.6	1,164.7	77.2	1,350.8	89.2	1,560.4	111.0	1,942.4	122.3	2,140.3
1 1/2"	40	DN 40	42.7	1,494.3	52.0	1,819.8	60.3	2,110.6	69.7	2,438.1	86.7	3,035.1	95.5	3,344.2
2"	50	DN 50	66.7	2,334.8	81.2	2,843.5	94.2	3,297.8	108.8	3,809.5	135.5	4,742.3	149.3	5,225.3
2 1/2"	65	DN 65	112.7	3,945.8	137.3	4,805.5	159.2	5,573.3	183.9	6,438.0	229.0	8,014.5	252.3	8,830.7
3"	80	DN 80	170.8	5,977.1	208.0	7,279.4	241.2	8,442.4	278.6	9,752.2	346.9	12,140.3	382.2	13,376.7
4"	100	DN 100	266.8	9,339.3	325.0	11,374.0	376.9	13,191.2	435.4	15,237.9	542.0	18,969.2	597.2	20,901.1
5"	125	DN 125	416.9	14,592.6	507.8	17,771.9	588.9	20,611.3	680.3	23,809.1	846.8	29,639.4	933.1	32,658.0
6"	150	DN 150	600.4	21,013.3	731.2	25,591.5	848.0	29,680.3	979.6	34,285.2	1,219.4	42,680.7	1,343.6	47,027.5
8"	200	DN 200	1,067.3	3,7357.1	1,299.9	45,496.0	1,507.6	52,765.0	1,741.5	60,951.4	2,167.9	75,876.8	2,388.7	83,604.5
10"	250	DN 250	1,667.7	58,370.4	2,031.1	71,087.6	2,355.6	82,445.3	2,721.0	95,236.6	3,387.4	118,557.6	3,732.3	130,632.1
12"	300	DN 300	2,401.5	84,053.4	2,924.7	102,366.1	3,392.0	118,721.2	3,918.3	137,140.7	4,877.8	170,722.9	5,374.6	188,110.2



Measuring ranges for steam VX 570 under operating conditions in lb/h																
Inside diameter of pipe			T=233.6 °F		T=249.8 °F		T=273.2 °F		T=291.2 °F		T=318.2 °F		T=329 °F		T=339.8 °F	
			P=7.3 psi(g)		P=14.5 psi(g)		P=29 psi(g)		P=43.5 psi(g)		P=72.5 psi(g)		P=87 psi(g)		P=101.5 psi(g)	
			D=0.0034 lb/ft3		D=0.0721 lb/ft3		D=0.1044 lb/ft3		D=0.1364 lb/ft3		D=0.1986 lb/ft3		D=0.2292 lb/ft3		D=0.2633 lb/ft3	
Inch	mm	DN	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
1/2"	15	DN 15	7.4	86.3	9.7	113.3	14.1	164.0	18.4	214.3	26.8	312.1	30.9	360.1	35.5	413.7
3/4"	20	DN 20	13.2	153.4	17.3	201.4	25.0	291.6	32.7	381.0	47.6	554.9	54.9	640.1	63.0	735.5
1"	25	DN 25	13.7	239.7	18.0	314.7	26.0	455.6	34.0	595.3	49.5	867.0	57.2	1,000.2	65.7	1,149.3
1 1/4"	32	DN 32	22.4	392.7	29.5	515.6	42.7	746.4	55.7	975.4	81.2	1,420.5	93.6	1,638.8	107.6	1,882.9
1 1/2"	40	DN 40	17.5	613.7	23.0	805.6	33.3	1,166.2	43.5	1,524.1	63.4	2,219.5	73.2	2,560.6	84.1	2,942.1
2"	50	DN 50	27.4	958.9	36.0	1,258.8	52.1	1,822.2	68.0	2,381.3	99.1	3,467.9	114.3	4,000.9	131.3	4,597.0
2 1/2"	65	DN 65	46.3	1,620.5	60.8	2,127.3	88.0	3,079.6	115.0	4,024.5	167.5	5,860.8	193.2	6,761.5	222.0	7,768.9
3"	80	DN 80	70.1	2,454.7	92.1	3,222.5	133.3	4,664.9	174.2	6,096.2	253.7	8,877.9	292.6	10,242.2	336.2	11,768.4
4"	100	DN 100	109.6	3,835.4	143.9	5,035.1	208.3	7,289.0	272.2	9,525.3	396.3	13,871.7	457.2	16,003.4	525.4	18,388.0
5"	125	DN 125	171.2	5,992.8	224.8	7,867.4	325.4	11,389.0	425.2	14,883.3	619.3	21,674.5	714.4	25,005.4	820.9	28,731.3
6"	150	DN 150	246.6	8,629.7	323.7	11,329.1	468.6	16,400.2	612.3	21,432.0	891.8	31,211.3	1,028.8	36,007.7	1,182.1	41,373.1
8"	200	DN 200	438.3	15,341.7	575.4	20,140.5	833.0	29,155.8	1,088.6	38,101.4	1,585.3	55,486.7	1,829.0	64,013.8	2,101.5	73,552.2
10"	250	DN 250	684.9	23,971.4	899.1	31,469.6	1,301.6	45,556.0	1,701.0	59,533.4	2,477.1	86,698.0	2,857.8	100,021.5	3,283.6	114,925.3
12"	300	DN 300	986.3	34,518.8	1,294.7	45,316.2	1,874.3	65,600.6	2,449.4	85,728.1	3,567.0	124,845.2	4,115.2	144,031.0	4,728.4	165,492.4

Measuring ranges for steam VX 570 under operating conditions in lb/h														
Inside diameter of pipe			T=348.8 °F		T=365 °F		T=377.6 °F		T=390.2 °F		T=410 °F		T=419 °F	
			P=116 psi(g)		P=145 psi(g)		P=174 psi(g)		P=203 psi(g)		P=261 psi(g)		P=290 psi(g)	
			D=0.2948 lb/ft3		D=0.3591 lb/ft3		D=0.4165 lb/ft3		D=0.4811 lb/ft3		D=0.5989 lb/ft3		D=0.6599 lb/ft3	
Inch	mm	DN	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
1/2"	15	DN 15	39.7	463.3	48.4	564.2	56.1	654.3	64.8	755.9	80.7	940.9	88.9	1,036.8
3/4"	20	DN 20	70.6	823.6	86.0	1,003.0	99.7	1,163.3	115.2	1,343.7	143.4	1,672.8	158.0	1,843.2
1"	25	DN 25	73.5	1,286.8	89.6	1,567.2	103.9	1,817.6	120.0	2,099.6	149.4	2,613.7	164.6	2,879.9
1 1/4"	32	DN 32	120.5	2,108.4	146.7	2,567.7	170.2	2,978.0	196.6	3,440.0	244.7	4,282.4	269.6	4,718.5
1 1/2"	40	DN 40	94.1	3,294.3	114.6	4,012.1	132.9	4,653.1	153.6	5,375.0	191.2	6,691.2	210.6	7,372.7
2"	50	DN 50	147.1	5,147.4	179.1	6,268.9	207.7	7,270.4	240.0	8,398.4	298.7	10,455.0	329.1	11,519.8
2 1/2"	65	DN 65	248.5	8,699.1	302.7	10,594.4	351.1	12,287.0	405.5	14,193.3	504.8	17,668.9	556.2	19,468.4
3"	80	DN 80	376.5	13,177.3	458.5	16,048.3	531.8	18,612.3	614.3	21,500.0	764.7	26,764.8	842.6	29,490.6
4"	100	DN 100	588.3	20,589.6	716.4	25,075.4	830.9	29,081.7	959.8	33,593.7	1,194.9	41,819.9	1,316.5	46,079.1
5"	125	DN 125	919.2	32,171.2	1,119.4	39,180.3	1,298.3	45,440.2	1,499.7	52,490.2	1,867.0	65,343.7	2,057.1	71,998.6
6"	150	DN 150	1,323.6	46,326.5	1,612.0	56,419.7	1,869.5	65,433.9	2,159.6	75,585.9	2,688.4	94,094.9	2,962.2	103,678.0
8"	200	DN 200	2,353.1	82,358.2	2,865.8	100,301.6	3,323.6	116,326.8	3,839.3	13,4374.9	4,779.4	167,279.8	5,266.2	184,316.4
10"	250	DN 250	3,676.7	128,684.7	4,477.8	156,721.3	5,193.2	181,760.7	5,998.9	209,960.7	7,467.8	261,374.7	8,228.4	287,994.4
12"	300	DN 300	5,294.5	185,306.0	6,448.0	225,678.6	7,478.2	261,735.4	8,638.4	302,343.4	10,753.7	376,379.5	11,848.9	414,711.9